2023-07-27



Replaces: RN 860-1:2023-04-13

Delivery conditions for Castings

Grey cast iron

Content

Page

1	Sco	ope	2
2	Re	ferences	2
3	Pai	rt categories	3
4	Re	quirements	3
4	4.1	General requirements	3
	4.2	Requirements on part category A	
4	4.3	Surface quality	3
4	4.4	Treatment of bad spots by manufacturer	4
5	Ot	her requirements	5
Ap	pend	ix A Illustrations for Yacht Premium version	6

Changes

2023-07-27:

The following changed in comparison to RN 860-1:2023-04-13:

- a) updated references
- b) Chapter 4.2: Inclusion of radius design
- c) Chapter 4.2: Correction regarding material samples / omission of RN 1550
- d) Labelling completely transferred to RN 1936
- e) editorially revised

Responsible Division:	Editor:	Approval:	Technical reference:	Page:
РК	M. Förste	see doc. workflow	C. Eschert	1/8

© REINTJES GmbH 2023 - Any kind of reproduction, completely or in extracts, permitted only with prior written approval of REINTJES GmbH.2023-07-27



1 Scope

This factory standard applies in addition to the standards for raw castings of grey cast iron quoted in chapter 2 and has priority over the standards listed below.

2 References

The following documents, cited in part or in whole, shall apply for the use of this standard. In the case of dated references, only the referenced edition applies; in the case of undated references, the latest edition of the referenced document (including all amendments) applies. The applicable version of the standards listed below shall apply to all contents not covered by this factory standard.

EN 1370	Founding – Examination of surface condition
EN 1559-1	Founding – Technical conditions of delivery – Part 1: General
EN 1559-3	Founding – Technical conditions of delivery – Part 3: Additional requirements for iron castings
EN 1561	Founding – Grey cast irons
EN 10204	Metallic products – Types of inspection documents
EN ISO 6506-1	Metallic materials - Brinell hardness test - Part 1: Test method
EN ISO 6892-1	Metallic materials - Tensile testing - Part 1: Method of test at room temperature
EN ISO 8062-3	Geometrical product specifications (GPS) – Dimensional and geometrical tolerances for moulded parts – Part 3: General dimensional and geometrical tolerances and machining allowances for castings
EN ISO 12944-4	Paints and varnishes – Corrosion protection of steel structures by protective paint systems – Part 4: Types of surface and surface preparation
RN 72	Packaging and Preservation; Supply parts for production
RN 79	Colour Coatings
RN 1567	Remanent magnetism in components
RN 1936	Labelling; Raw material, parts and gearboxes
0-123-73126	HB measuring points
0-124-77303	Production specification radius design



3 Part categories

Materials for parts made of cast iron with lamellar graphite (grey cast iron) are specified according to EN 1561. The following material classification applies in general:

Table 1Materials and part categories

Part c	category	EN 1561 designation
A) H	ousings with classification according to hardness values	EN-GJL-HB195 (5.1304)
	ushings and other small parts with classification according to tensile trength	EN-GJL-200 (5.1300)
	earing housings, coupling carriers etc. with classification according to ensile strength	EN-GJL-250 (5.1301)

4 Requirements

4.1 General requirements

Heat treatment:	•	residual stresses in the casting must be minimised (controlled cooling in the mould is preferable to stress relieving) the casting must be stress-relieved on delivery
General tolerances ¹⁾ :	•	ISO 8062-3 tolerance grade DCTG11
Geometrical tolerances ¹⁾ :	•	ISO 8062-3 tolerance grade GCTG5
Machining allowances ¹⁾ :	•	ISO 8062-3 grade H, RMA
Radioactivity:	•	≤ 0,10 Bq/g
1)		

¹⁾ Unless specified otherwise in drawing or order

4.2 Requirements on part category A

Hardness:	 Brinell hardness according to EN 1561
Tensile strength:	 acc. to EN 1561, table 1, material EN-GJL-200
Samples:	 separately cast test samples according to EN 1561 for the preparation of the material certificate acc. to chapter 5 f)
Chemical composition:	 C and Si depending on the required strength and hardness values Mn > 0,5 %; P < 0,5 %
Radius design ¹⁾ :	acc. to production specification 0-124-77303
4.3 Surface quality	
Surface roughness Standard:	 inspection acc. to EN 1370 using BNIF reference samples raw-cast state: 5 S1 to 6 S1 mechanically machined surfaces: 2 S2 to 3 S2
Yacht Premium ²⁾ :	 raw-cast state, outer surfaces: 2 S1 to 3 S1 raw-cast state, inner surfaces: 5 S1 to 6 S1 mechanically machined surfaces: 1 S2 to 2 S2 thermally processed surfaces: 1 S3 to 2 S3



	surface discontinuities: H < 0,5 mm A smooth, homogeneous surface must be ensured, if necessary by suitable finishing.		
Surface treatment Standard: Yacht Premium ²⁾ : Coating:			
Bad spots:	 depth ≤ 1/3 x wall thickness and/or size ≤ 1 x wall thickness treatment according to chapter 4.4 special approval required for: accumulation of minor bad spots and/or for larger bad spots 		
Additional requirements:	 no production welds no sand pockets, mineralisation or other impurities castings are oil-tight and free of cracks outer edges free of burrs -1 ISO 13715 <u>-2.5</u> 		
²⁾ Order designation for housings in Yacht Premium finish: Housing RN 860-1 YP			
4.4 Treatment of bad spots by manufacturer			
Repair:	 do not fill bad spots, but grind them properly 		

Repair:	 do not fill bad spots, but grind them properly (no visible impurities, shrink holes etc., minimized notch effect)
Documentation:	 measure bad spots, write dimensions clearly and legibly on the casting (indicate length, width, depth, residual wall thickness and position) photograph model number for identification (housings only) photograph casting so that bad spot(s) can be localized make close-ups so that dimensions of bad spot(s) are clearly visible
Information, Approval:	 Photographs of casting and/or bad spot(s) and short description of bad spot(s) (type, position, dimensions etc.)
	must be sent to the purchasing and quality assurance departments of REINTJES for an assessment and the decision for further action



5 Other requirements

a)	Steel and forging plant		
	• certified acc. to:	DIN EN ISO 9001 ff.	
	• approved by at least two m	nember societies of IACS	
b) Measurement of hardness and tensile strength		tensile strength	
	 part category A 	always	
	• part categories B, C	on special request only	
c)	Packaging and Preservation		
	•	RN 72	
d)	Remanent Magnetism		
	•	RN 1567	
e)	Labelling		
	•	RN 1936	
f)	Documentation (must be digitally available upon delivery)		
	• acceptance test certificate tensile strength	EN 10204 - 3.1 indicating chemical composition, Brinell hardness and	


- REINTJES quality control plan (geometric dimensions)
- drawings (only if requested in the order):
 - initial sample acceptance drawing
 - inspection drawing 0-123-73126 for HB measuring points (only for part category A)
- evidence of radioactivity and remanent magnetism



Appendix A Illustrations for Yacht Premium version

OK:



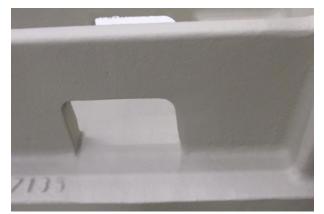

uniform surface



uniform surface



uniform surface



significant machining marks



uneven suface




uneven suface




OK:



burr-free transitions

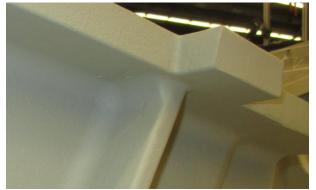

uniform radii and transitions

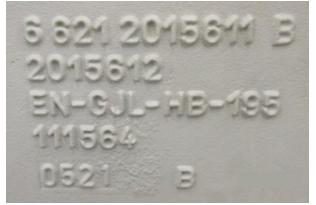

labeling easy to read, even font size

NOT OK:



burr is present



constriction present



labeling difficult to read, different font sizes



Further examples of poor casting:



porosities



surface defects




constriction at the transition, machining marks



material defects



missing material

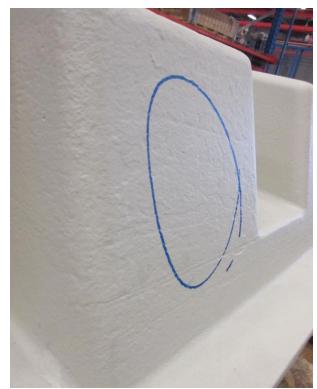

very rough surface